


# Pearl Film

Carlas Int'l Automobile  
Accessory Limited

## SPECIFICATION

ARTICLE CODE: CLS-G34XX

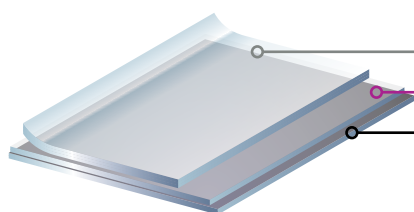

Surface material  
Pressure sensitive adhesive  
Liner

	SURFACE MATERIAL	LINER
	PVC	PE
ARTICLE NAME	PVC Film	Pe lami release paper
THICKNESS (mm)	0.11±0.01	0.19±0.01
BASIC WEIGHT (g/m <sup>2</sup> )	130±10	160± 5
COLOR	—	white
SMOOTHNESS	—	—
TENSION STRENGTH ( g/15mm)	—	—
PRINT ABILITY	—	—
DIE CUTTING	—	good

PRESSURE SENSITIVE ADHESIVE	
ADHESIVE BASE	Acrylic
THICKNESS (mm)	0.035±0.002
BRY COATING WEIGHT (g/m <sup>2</sup> )	88±5
180° PEEL ADHESIVE (kg/25mm)	0.8±
INITIAL TACK (NO/BALL)	6±
RELEASE FORCE	7~25
HOLDING POWER	8±
WEATHER RESISTANCE	good
TEMPERATURE RANGE (°C)	-10~80°C
SOLVENT RESISTANCE	—

### REMARK

The technical data are based on reliable experiments carried out by the" company". Which however; are not to guarantee those proper ties and character is tics complexly as specified Therein, kindly study your purpose ,condition and this product properly before application.

SELF LIFE	2 years from date of manufacture (when stored between 20°-25°C and 50% R.H.)
DURABILITY	5 years
WARRANTY	6 - 12 months, depending on geographical area
MINIMUM APPLICATION TEMPERATURE	15°C
SERVICE TEMPERATURE	-10°- 80°C